

PSU PSB-D48-7A-N Power Supply

48vDC, 7.2A Power Supply for the Jaegar and Osiris PT Platforms

The Silent Sentinel PSB-D48-7A-N Power Supply (PSU) is the perfect accessory for the Jaegar and Osiris PT platforms.

The PSU is compact in design and features an integrated 5 port Gigabit network switch to allow for easy installation. With RS485 and auxiliary outputs, a 48vDC 7.3A output and a 24vDC 1.2A output, and 110vAC to 230vAC power inputs - this PSU can cater for most needs into one standard box.


Key Features

- Suitable for the Jaegar and Osiris Range
- Integrated 5 Port Gigabit Network Switch
- IP66, IK07 Rated Polystyrene Enclosure
- CE and RoHS compliant



Technical Specification

| | |
|-------------------|---|
| Power Output | Output 1 - 48vDC, 7.3A Output 2 - 24-30vDC, 1.2A |
| Power Input | 115vAC or 230vAC |
| Auxiliary Ports | 1x RS485, 1x Relay/Aux output |
| Network Ports | 5x Gigabit /10/100/1000 Mbps Ports (2x ports are used as standard, 3x ports are spare) Full duplex, providing up to 2000 Mbps on each port Auto-sensing on each port detects at the best network speed (10Mbps, 100Mbps or 1000Mbps) Auto Uplink technology auto adjusts for different types of Ethernet cable |
| Impact Resistance | IK07 |
| Colour | Light Grey (similar to RAL 7035) |
| Material | Base & Cover: Polystyrene Sealing: Polyurethane Cover screw: Polyamide 6, fibre-glass reinforced |
| Weight | 2.5Kg (5.51 lb) |
| Dimensions | 361mm (W) x 254mm (H) x 111mm (D) |
| Part Number | PSB-D48-7A-N |

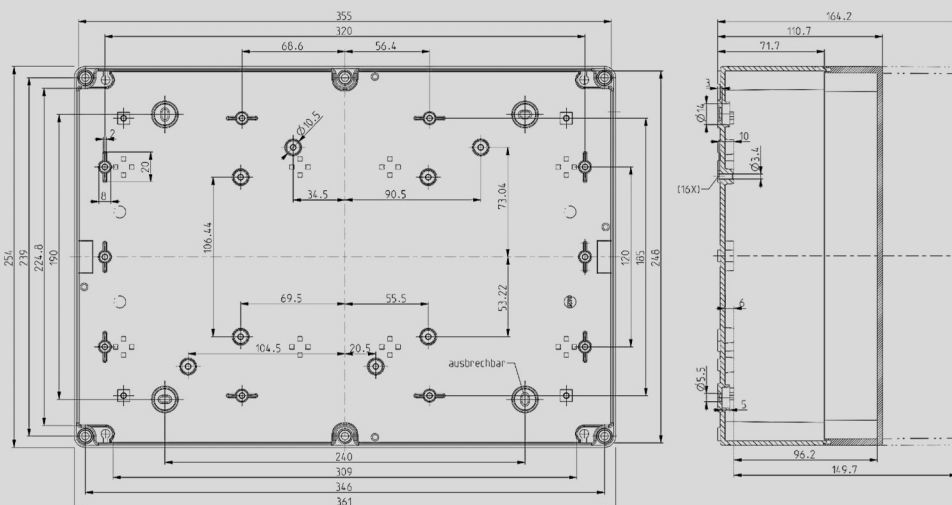

* Detailed dimension drawing available upon request.



The Silent Sentinel Range
Silent Sentinel offer an extensive range of camera and lens configurations to meet your exact surveillance requirements
Tel: +44 (0) 1920 871 734
www.silentsentinel.com