

PSU RC-PSB1 Power Supply

3A Power Supply for the Aeron and Oculus Camera Stations

The Silent Sentinel RC-PSB1 Power Supply (PSU) is the perfect accessory for the Aeron and Oculus camera platforms.

The PSU is compact in design and features an integrated termination PCB to allow for easy installation. With RS485 and auxiliary outputs, 24vDC 3A and 1.2A outputs, and 110vAC to 230vAC power inputs - this PSU can cater for most needs in one standard box.




Key Features

- Suitable for the Aeron and Oculus Camera Ranges
- Integrated termination PCB
- IP66, IK07 Rated Polystyrene Enclosure
- CE and RoHS compliant

Technical Specification

Power Output	Output 1 - 24-30vDC, 3A Output 2 - 24-30vDC, 1.2A
Power Input	115vAC, 2A or 230vAC 1.2A (Input range 88vAC to 264vAC)
Auxiliary Ports	1x RS485, 1x Relay/Aux output
Impact Resistance	IK07
Colour	Light Grey (similar to RAL 7035)
Material	Base & Cover: Polystyrene Sealing: Polyurethane Cover screw: Polyamide 6, fibre-glass reinforced
Weight	2Kg (4.41 lb)
Dimensions	254mm (W) x 180mm (H) x 111mm (D)
Part Number	RC-PSB1

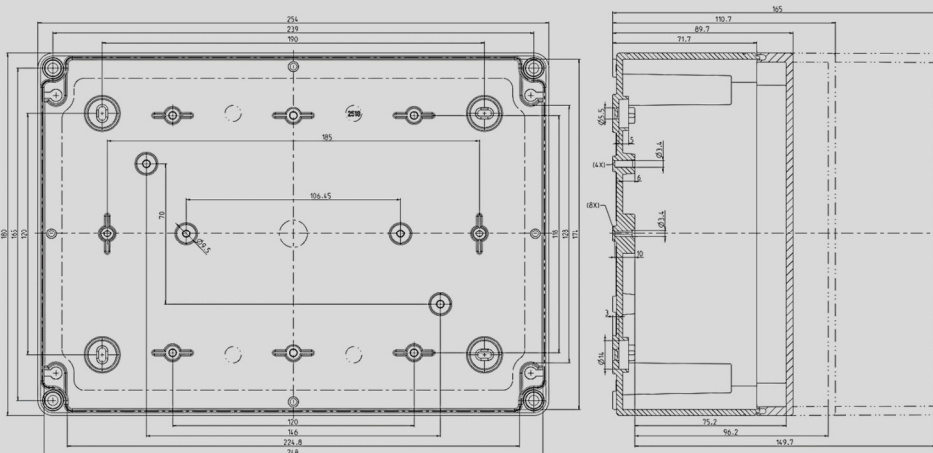

* Detailed dimension drawing available upon request.



www.silentsentinel.com

Specifications may be subject to change without notice 250219, V3.0

The Silent Sentinel Range
Silent Sentinel offer an extensive range of camera and lens configurations to meet your exact surveillance requirements

Tel: +44 (0) 1920 871 734
www.silentsentinel.com

SILENT SENTINEL
VISION & MOTION CONTROL

OCULUS AERON OSIRIS JAEGAR